【MAIN BOARD】 CND, E, EA, AR, HK, MX, MY, SP, AUS

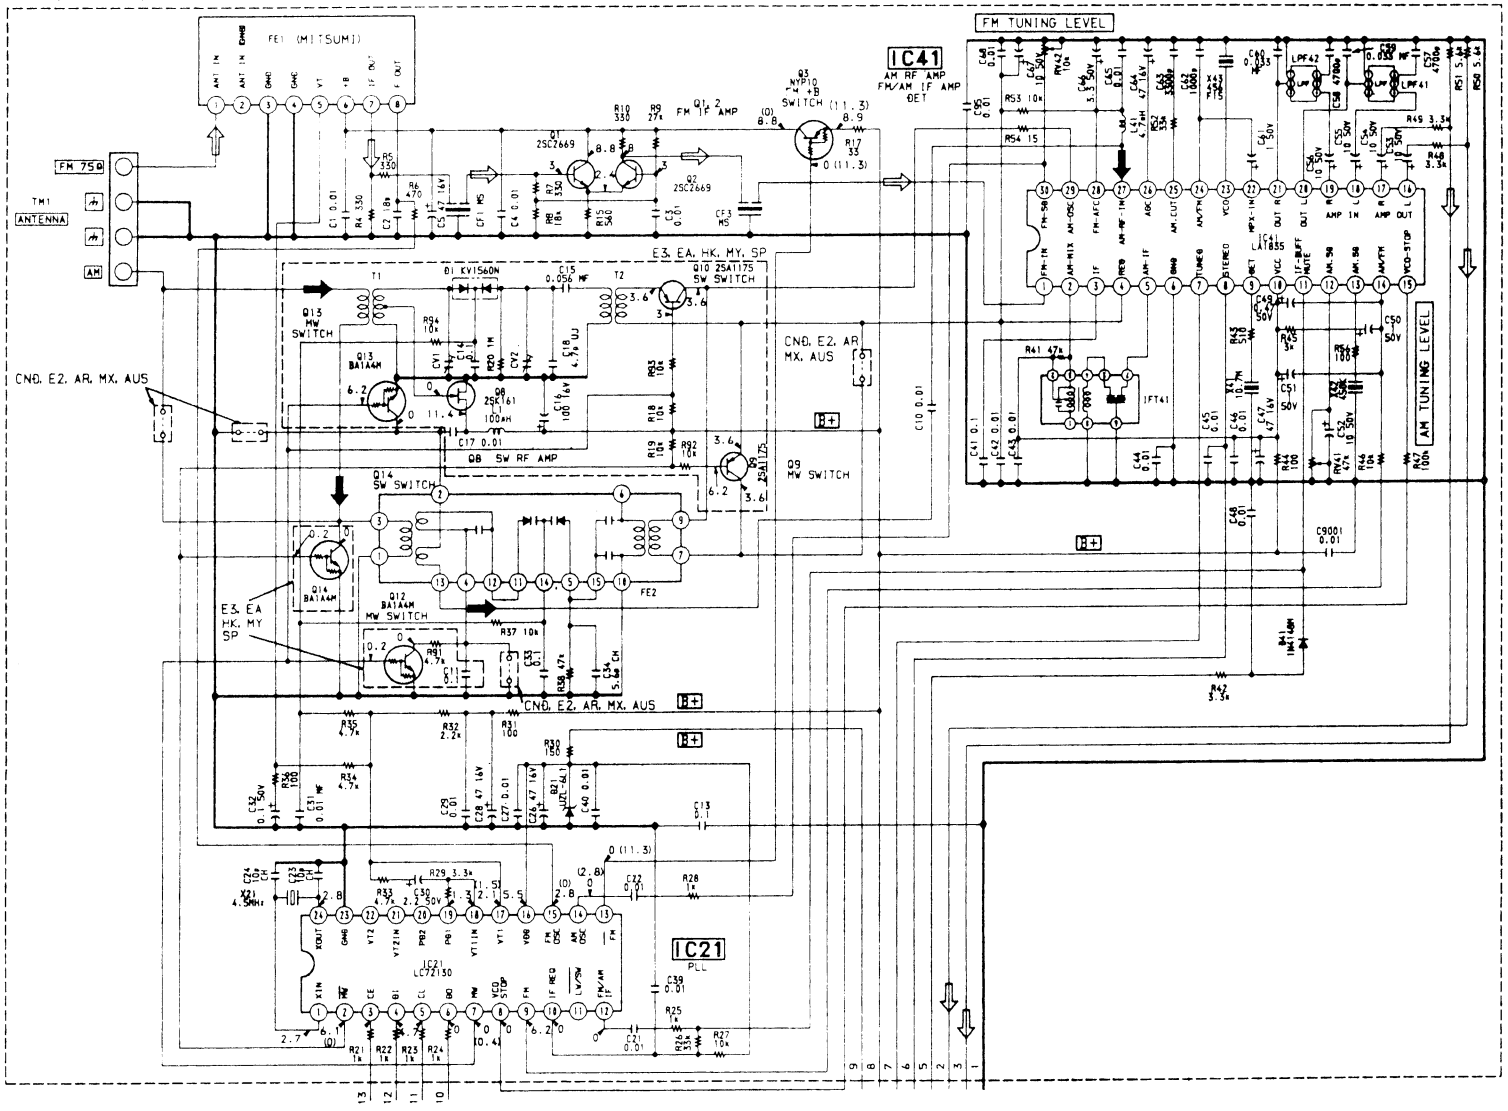

Note on Schematic Diagram:

- All capacitors are in μF unless otherwise noted. pF: μμF 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and ¼ W or less unless otherwise specified.
- B + : B + Line.
- ▭ : adjustment for repair.
- Voltage is dc with respect to ground under no-signal (detuned) conditions.
  no mark : FM
  ( ) : MW
- Voltages are taken with a VOM (Input impedance 10 MΩ).
  Voltage variations may be noted due to normal production tolerances.
- Signal path.
  ⇨ : FM
  ➡ : MW
- Abbreviation
  CND : Canadian
  AUS : Australian
  EA : Saudi Arabia
  AR : Argentine
  HK : Hong Kong
  MX : Mexican
  MY : Malaysia
  SP : Singapore

Note on Printed Wiring Board:

- ○——— : parts extracted from the component side.